


KOPPELING BI/BI conisch dichtend
RACCORD F/F à siège conique



316 (L)


EN 1.4401
EN 1.4404

SWEDISH

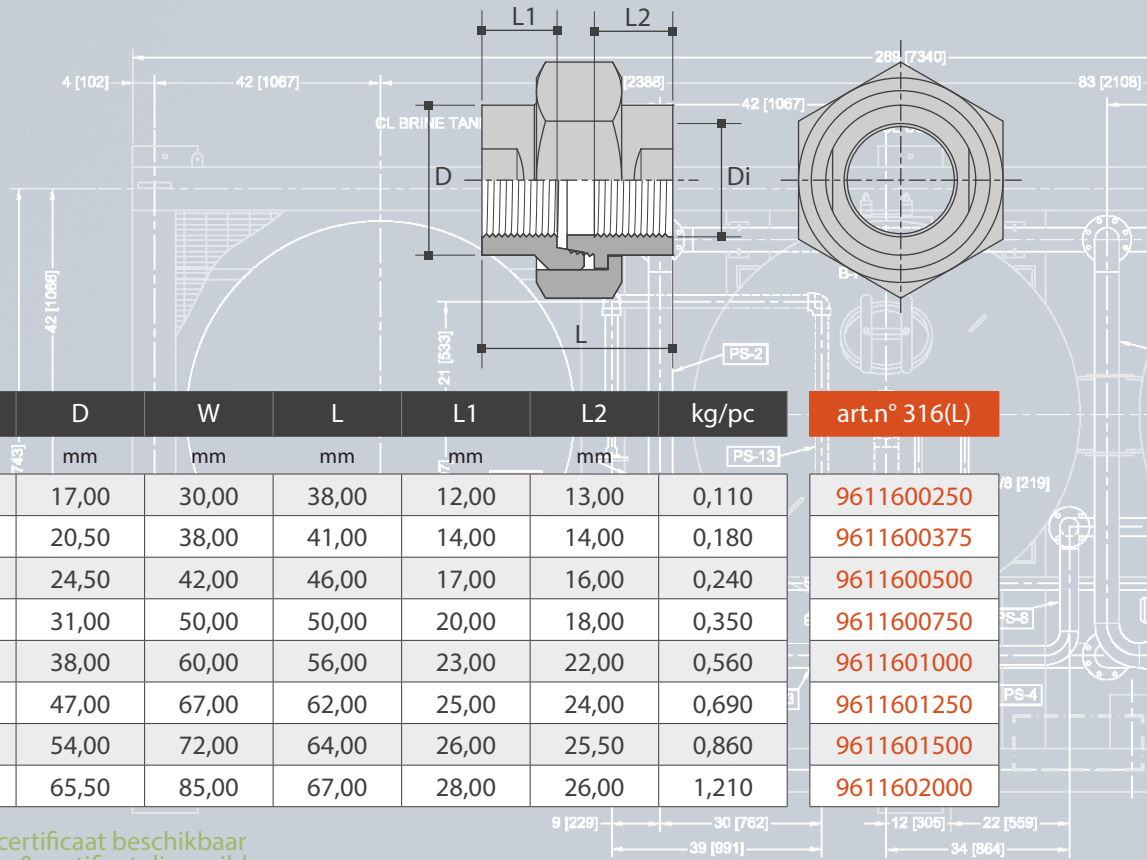

Di	Di	D	W	L	L1	L2	kg/pc	art.n° 316(L)
DN	inch	mm	mm	mm	mm	mm		
8	1/4"	17,00	30,00	38,00	12,00	13,00	0,110	9611600250
10	3/8"	20,50	38,00	41,00	14,00	14,00	0,180	9611600375
15	1/2"	24,50	42,00	46,00	17,00	16,00	0,240	9611600500
20	3/4"	31,00	50,00	50,00	20,00	18,00	0,350	9611600750
25	1"	38,00	60,00	56,00	23,00	22,00	0,560	9611601000
32	1 1/4"	47,00	67,00	62,00	25,00	24,00	0,690	9611601250
40	1 1/2"	54,00	72,00	64,00	26,00	25,50	0,860	9611601500
50	2"	65,50	85,00	67,00	28,00	26,00	1,210	9611602000

smeltnummer & certificaat beschikbaar
numéro de coulée & certificat disponible
heat number & certificate available
Schmelze & Zertifikat verfügbar

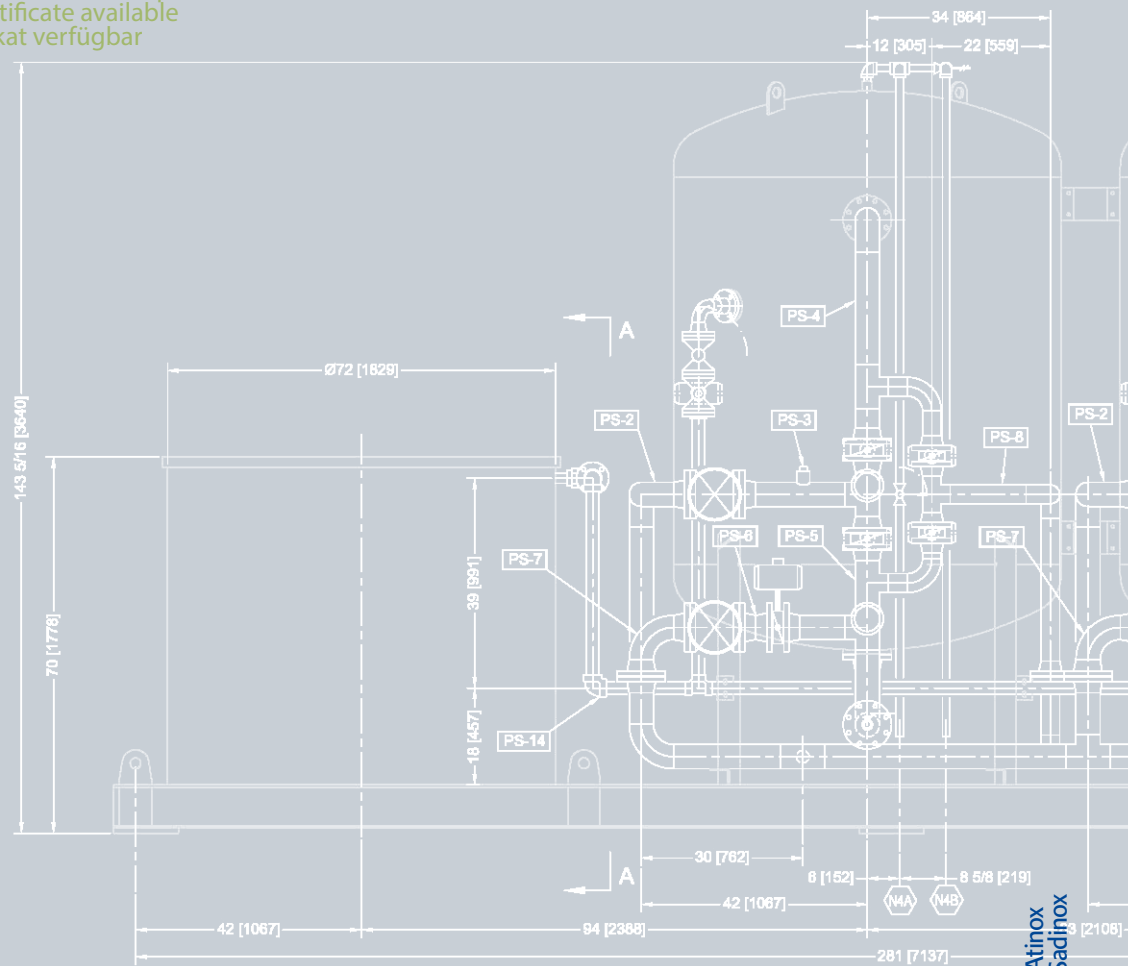

VERSCHRAUBUNG I/I konisch-dichtend
UNION F/F conical taper

